
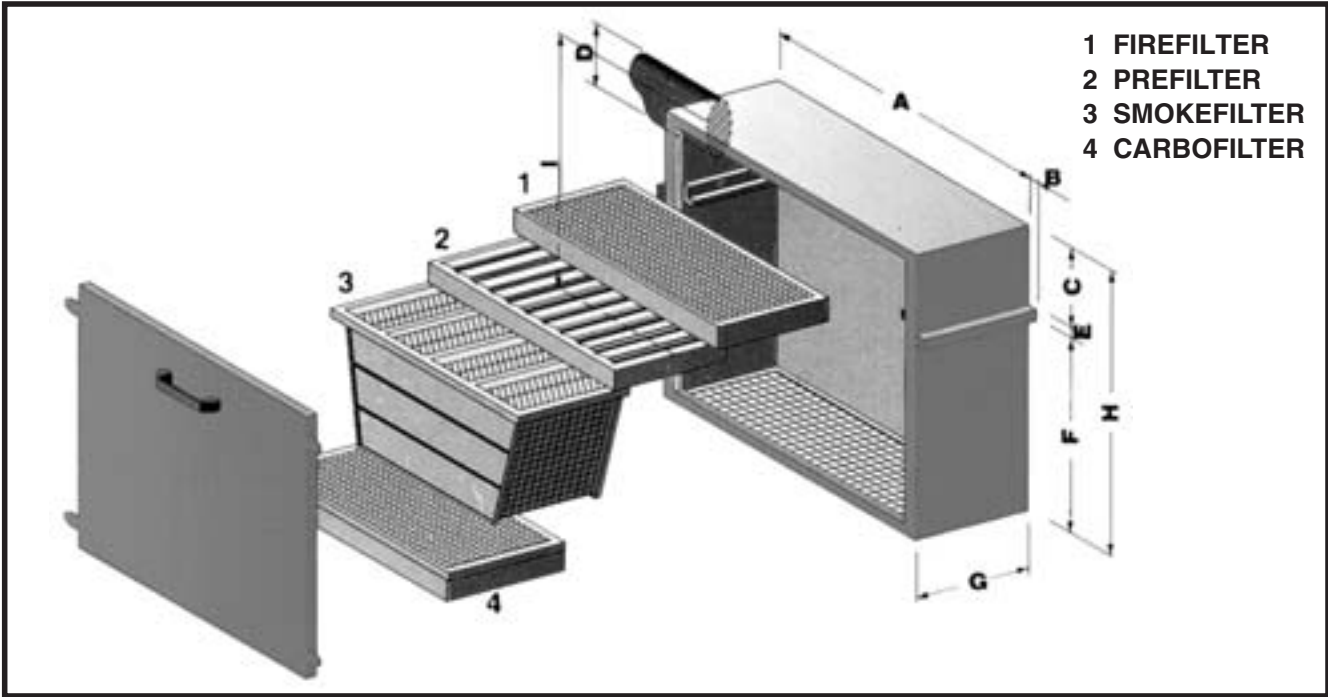


ECOFILTER

GB Represents the most compact and economic solution for the filtering of welding fumes, gases, vapours, aerosols, etc...
Is installed on a wall or fixed to the ground near work areas, for the removal of pollutants and recycling of purified air into environment. To treat high air flow rates, several "ECOFILTER" can be connected in parallel.

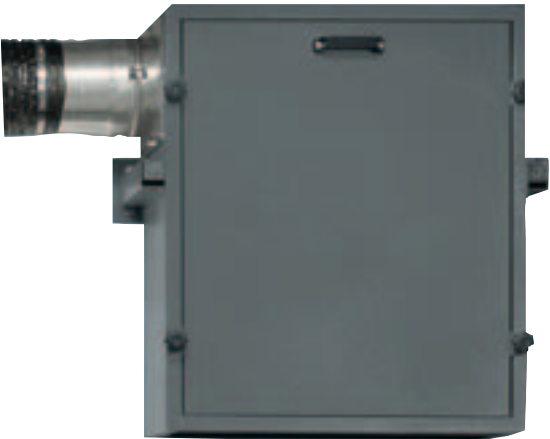

Model	Max capacity		Pressure drop		Filtering efficiency	Weight		Charcoal		DIMENSIONS								
	m3/h	c.f.m.	mm/H2O	Pa		Kg.	Lbs	Kg.	Lbs	A	B	C	D	E	F	G	H	I
ECOFILTER 2000	2000	1176	75	750	95	37	81,4	8	17,6	700	45	320	200	55	445	310	820	690
ECOFILTER 4000	4000	2352	85	850	95	62	136,4	16	35,2	700	45	300	200	55	465	610	820	690

ACCESSORIES

Serie CK

GB Outlet flange with lip for channeled discharge

Serie CKS

GB Bearing (2 pieces)

FILTER WITH MECHANICAL GAS-DROP SYSTEM

